

NASA
Technical Memorandum 107226

Army Research Laboratory
Technical Report ARL-TR-1111

Acoustic Radiation Efficiency Models of a Simple Gearbox

Mark F. Jacobson and Rajendra Singh
Ohio State University
Columbus, Ohio

Fred B. Oswald
Lewis Research Center
Cleveland, Ohio

19961129 014

DTIC QUALITY INSPECTED 4

Prepared for the
Seventh International Power Transmission and Gearing Conference
sponsored by the American Society of Mechanical Engineers
San Diego, California, October 6-9, 1996



National Aeronautics and
Space Administration



DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

ACOUSTIC RADIATION EFFICIENCY MODELS OF A SIMPLE GEARBOX

Mark F. Jacobson¹ and Rajendra Singh
Ohio State University
Columbus, Ohio 43210

Fred B. Oswald
NASA Lewis Research Center
Cleveland, Ohio 44135

ABSTRACT

Acoustic intensity measurements were conducted on a simple spur gear transmission in a welded steel housing. The radiation efficiency of the housing was computed from the intensity data for the first three harmonics of mesh frequency. Finite element and boundary element methods (FEM/BEM) were used jointly to model acoustics and dynamics of the top plate of the housing. For a simply supported elastic plate, reasonable agreement was achieved between experimental radiation efficiencies and those predicted with FEM/BEM. However, predictions of the housing characteristics were only partially successful. Four simple analytical models were examined to judge their ability to predict the radiation efficiency. These models do not simulate the modal characteristics of a gearbox; therefore their predictions yield only general trends. Discrepancies are believed to be related to inaccurate modeling of the excitation of the structure as well as to interactions between modes of vibration.

INTRODUCTION

Much effort has been expended during the design process in recent years to predict the noise of machinery in order to reduce it. The mesh excitation of gear transmissions has been analyzed, and a method has been developed to model the transmission of vibration through bearings into the housing (Lim, 1989). The remaining step is to predict the characteristics of noise radiation from a vibrating structure. Seybert discusses a method for predicting radiation by a boundary element analysis of a vibrating surface (Seybert et al., 1994). Several studies have examined the sound radiation characteristics of single flat plates (panels) under various boundary conditions. A general review is given in Lim and Singh (1989). Other work includes Wallace (1972), Beranek (1971), Fahy (1985), Guyader (1994), and Cremer et al. (1973). Others have tried

to correlate gearbox-radiated noise with structural excitation (Oswald et al., 1992; Seybert et al., 1991; Kato et al., 1994; Sabot and Perret-Liaudet, 1994; VanRoosmalen, 1994; Lim, 1989; and Heath and Bossler, 1993). Many other studies are summarized in Lim and Singh (1989). Since acoustic radiation efficiency is the link between structural vibrations and the radiated sound power, it should be studied when attempts are being made to predict noise. This paper looks at several acoustic radiation efficiency models and compares them to experimental results. Identifying the usefulness of these models in housing design is the main focus of this paper.

APPARATUS

The gear noise test rig at NASA Lewis Research Center is equipped to accommodate spur and helical gears. Several types of measurements, including sound pressure, acoustic intensity, and housing acceleration, can be made on this rig (Oswald et al., 1992). The test rig consists of a single-mesh gear pair powered by a 150-kW (200 hp) variable-speed electric motor. An eddy-current dynamometer loads the output shaft. The gearbox can operate at speeds up to 6000 rpm.

For this study, the gears were identical 28-tooth spur gears with a 6.35-mm face width; they were manufactured to AGMA class-15 accuracy. The gears have a linear profile modification (tip relief) of 11 mm (0.00045 in.) that extends 90 percent of the distance from the tip to the high point of single tooth contact. For these gears, the transmission error is minimized at a load of 45 N·m (400 in-lbf). The housing is made of 6.35-mm-thick steel plates. The four corners of the base plate are bolted to a foundation that is assumed to be rigid. The sides of the box are welded to each other and to the base plate; the top plate is bolted down, but can be removed to change test gears. The whole rig is within a room whose floors, walls, and ceiling are covered with acoustic absorbing

¹Currently at Ford Motor Company, Dearborn, Michigan.

material. This provides a semi-anechoic test chamber that above 500 Hz attenuates reflected sound by at least 20 dB.

MEASUREMENTS

The sound power radiated from the gearbox was measured by using an acoustic intensity probe consisting of a pair of phase-matched microphones mounted face-to-face and spaced 6 mm apart. The probe was positioned with the aid of a computer-controlled robot (Oswald et al., 1992). The robot was commanded to move the probe to 20 locations, each approximately 60 mm above the top of the housing. The 20 intensity spectra were averaged and multiplied by the area of the top of the housing to yield the radiated sound power at that operating condition.

During the course of the experiments, we noticed that the amplitudes of the sidebands were significant relative to the levels at mesh frequency f_m , and the harmonics of f_m . This was particularly true at the higher speeds. Figure 1 shows the sound power spectrum for speed $\Omega = 6000$ rpm and torque $T = 68$ N-m. Here, the mesh frequency is 2800 Hz, and the shaft frequency is 100 Hz. In the spectrum some of the sidebands have significant amplitudes relative to the mesh frequency peak. We decided that a characterization of the sound power should include three pairs of sidebands in the computation.

The mean square velocity was obtained from the accelerometers located on the gearbox housing (we assumed sinusoidal response and integrated). Three housing locations were chosen for the spatial averaging (see Fig. 2). The velocity spectra contained significant sideband activity, just as the sound power spectra did.

Sound intensity measurements were taken only over the top plate rather than over the surface of an enclosing volume. This limitation was dictated by the difficulty and danger of taking measurements next to a rotating shaft. Limiting measurements to the top plate reduced the unwanted effects of noise from couplings adjacent to the gearbox.

One justification for limiting the measurements was that the top plate was less stiff than the sides and, thus, could vibrate more than the others, especially at low frequencies. Although the top plate is more flexible, how much this affects the vibratory power flow through the housing is not clear. The peak velocities of the bearing cap were an order of magnitude lower than those of the side or top plates. This is as expected since the spur gears generate no thrust force that would cause

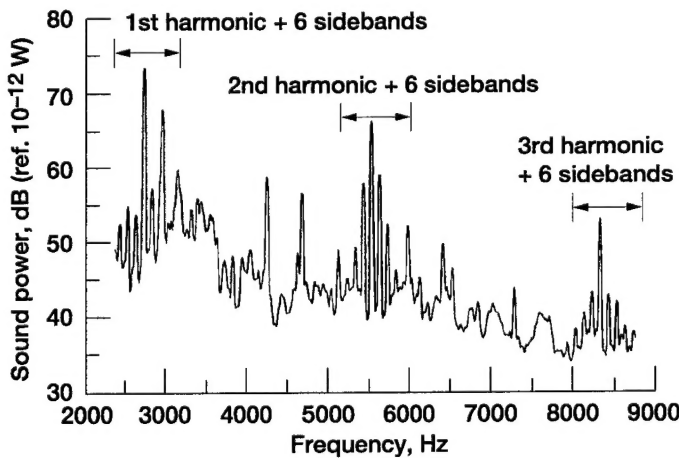


Figure 1.—Typical sound power spectrum (6000 rpm, torque = 68 N-m).

significant motion along the axis of the shaft. In addition, the bearing mounting plates are very stiff relative to the housing. The peak velocities of the side plate were about the same order of magnitude as those of the top plate. This suggests that a significant amount of power may be flowing through the side plates and could be radiated as sound. Future experiments should attempt to examine sound radiation from the side plates by using more accelerometer locations.

The acoustic radiation efficiency of a structure such as a gearbox may be defined as the measured sound power radiated from the structure divided by the sound power radiated by a piston in an infinite baffle. The area of the piston is equal to the surface area of the structure, and the vibration velocity of the piston equals that of the structure. The radiation efficiency may be computed for each frequency of interest and it may exceed one.

The experimental radiation efficiency σ_{rad}^* of the gearbox housing under operating conditions was estimated from the sound power and velocity by the following (Cremer et al., 1973):

$$\sigma_{rad}^*(f_i, T, \Omega) = \frac{W^*(f_i, T, \Omega)}{\rho c S [\langle v^2 \rangle_{s,t}(f_i, T, \Omega)]^*} \quad (1)$$

where W^* is the radiated sound power in watts, ρc is the acoustic impedance of the surrounding medium in rayls, S is the radiating area of the housing in meters squared, and $[\langle v^2 \rangle_{s,t}]^*$ is the spatially and temporally averaged mean square velocity of the housing in meters squared per second squared. In Eq. (1), the * indicates that these are in situ quantities, which depend on the measurement and operating conditions, including harmonic and sideband frequencies f_i , speed Ω , and torque load T .

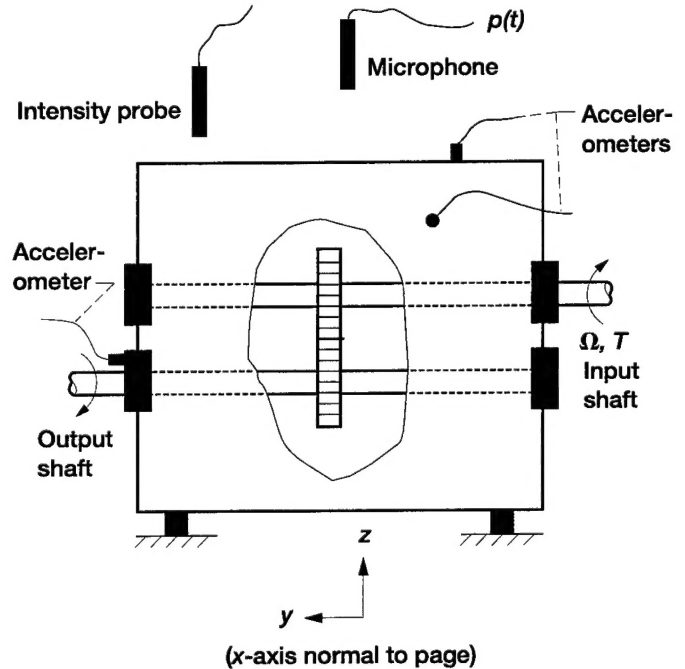


Figure 2.—Instrumentation.

RADIATION EFFICIENCY RESULTS

The radiation efficiency was computed from Eq. (1). The acoustic impedance of air is 415 rayls at 25 °C and 1 atmos. The surface area S of the top and four sides of the housing is 0.41 m². No acceleration measurements were taken on the bottom plate because it is not easily accessible. Therefore, the area of the bottom plate was not included in the computed surface area. The bottom plate is somewhat thicker than the sides and has stiffeners, so we expect it is not an effective sound radiator. The radiation efficiency computed from these parameters is plotted in Fig. 3. In general, the radiation efficiency tends to increase with operating speed for each harmonic and approaches unity as the speed becomes large enough so that the acoustic wavelength is no longer large relative to the dimensions of the gearbox. Several exceptions to the trend can be observed. Most notably, the 1st harmonic, at $\Omega = 1000$ rpm ($f_m = 467$ Hz), had a radiation efficiency nearly 10 times as large as at $\Omega = 1500$ rpm ($f_m = 700$ Hz). This variation in the radiation efficiency across the speed range is most probably the result of the interaction (coupling) between vibration modes of the housing. At least five housing modes are present below 900 Hz alone, as reported by Lim (1989), so the possibility of multimode excitation is likely. Each of these modes should have different modal radiation efficiencies, so an examination of the radiation efficiency on a modal basis would be useful. This will be left for a future study.

The three traces in Fig. 3 partially overlap. This allows us to compare the radiation efficiency for different harmonics at the same frequency. For example, at 2800 Hz, the mesh frequency (1st harmonic) occurs at 6000 rpm; twice the mesh frequency (2nd harmonic), at 3000 rpm; and three times the mesh frequency (3rd harmonic), at 2000 rpm. In many cases (except at the lowest frequencies) the overlapping curves agree reasonably well. This suggests that data from higher harmonics taken at fairly low speeds may be used to predict the radiation efficiency for low harmonics at higher speeds. In other words, perhaps we can predict the radiation efficiency for speeds beyond our operating range by examining data from higher harmonics within the operating range. This would be useful for future high-power-density rotorcraft transmissions.

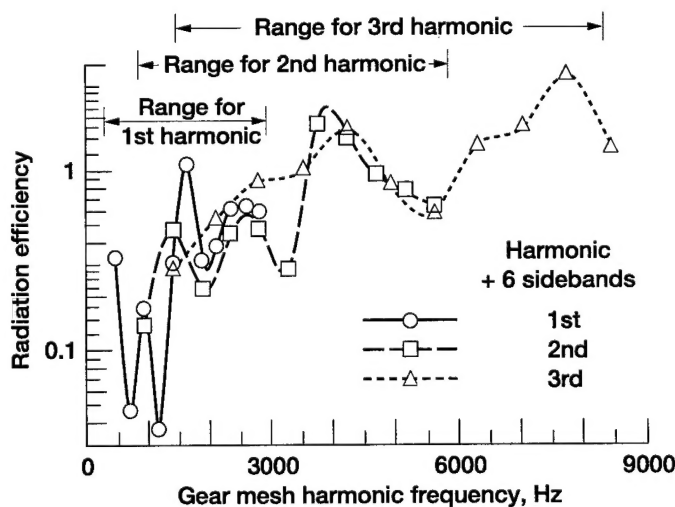


Figure 3.—Radiation efficiency for first three harmonics over speed range of 1000 to 6000 rpm and torque of 68 N-m.

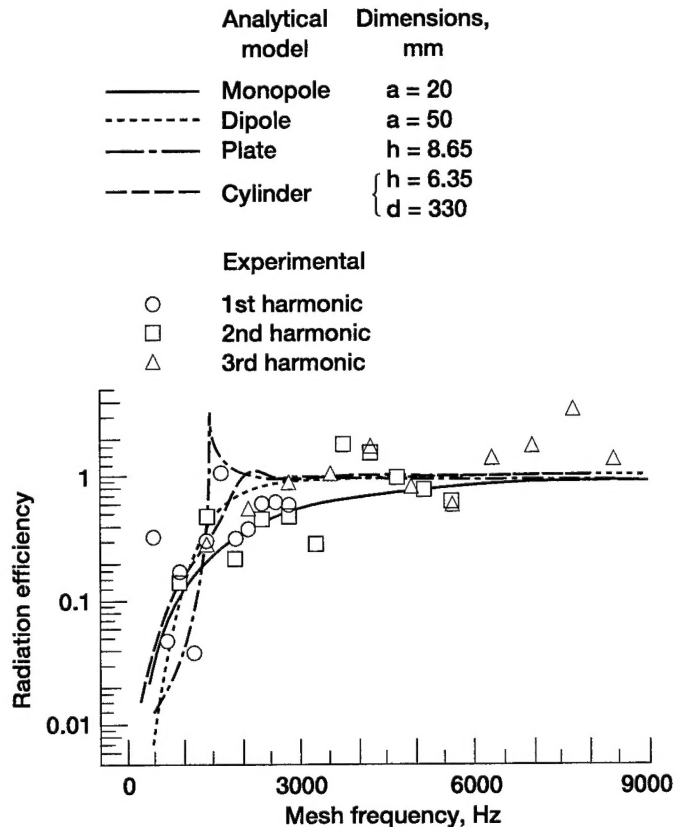


Figure 4.—Summary of analytical acoustic radiation models (a = radius, h = height, d = diameter).

Ideal acoustic source models such as the monopole (pulsating sphere of radius a) and the dipole (acoustic doublet—two simple sources of equal strength, separated by distance a , vibrating at the same frequency but 180° out of phase with each other) yield fast estimations of the housing radiation efficiency, but the utility of these models is difficult to justify on the basis of any apparent housing geometry. An equivalent (same mass and estimated modal density as gearbox housing) plate model that relies on an approximation of the modal density of the housing appears to be a better estimator. (Unfortunately, the modal densities of transmission housings may not be known.) An equivalent cylinder model based on the geometry of the housing, where plate thicknesses h are equal and cylinder diameter d equals the length of the gearbox housing, may also be a good estimator (Guyader, 1994). Figure 4 compares some of the better models studied, along with the experimental radiation efficiency values. Obviously, none of these models capture the variation that is present in the experimental radiation efficiency curves.

DYNAMIC AND ACOUSTIC MODELS OF THE TOP PLATE

The test gearbox is a rectangular housing made from steel plates welded together and a top plate bolted on. For a simple analysis, a finite element method (FEM) model was generated for only the top plate. The top plate is 286 by 362 by 6.35 mm. Shell elements were used to generate a model with 120 elements and 143 nodes. The boundary conditions of the plate were modeled so that the nodes at the four corners

had all degrees of freedom set to zero (clamped condition), and the nodes along the edges alternated between being completely free and being clamped. This scheme simulated the bolted connection between the top plate and the top flange of the housing, which is depicted in Fig. 5. With this model, the first four natural frequencies were determined. They are shown in Table I along with the previous experimental measurements (Oswald et al., 1992). The modal index is the number of antinodes along the width and length of the plate. The discrepancy between the FEM and measured results is less than 9 percent.

Table I.—Natural Frequencies of the Gearbox Top Plate

Modal index	Frequency, Hz		
	Predicted	Measured ^a	Error, percent
(1,1)	508	511	0.6
(1,2)	898	975	8.6
(2,1)	1175	1273	8.3
(2,2)	1530	1631	6.6

^aOswald et al. (1992).

The FEM and measured mode shapes (not shown) were also similar. This indicates that the model reasonably simulates the response of the gearbox top in the frequency range studied. Using this plate model, we applied three arbitrary loading conditions to conduct forced response and acoustic radiation studies. These loading conditions were not meant to represent actual loads seen by the test gearbox; rather, they were meant to be a starting point for comparing the effects of different loads on the acoustic efficiency of the plate and the housing. The different loads were (i) a 1-N force normal to the plate, applied at a point on the edge as shown in Fig. 6(a); (ii) a 1-N·m moment about the y-axis of Fig. 6(b), applied at the same node as for case (i); and (iii) several 1-N forces normal to the plate and equal in phase, applied along the plate edge at the free nodes as shown in Fig. 6(c). For a linear system, the predicted radiation efficiency is not affected by the magnitude of the applied force. To simulate the range of speeds in the experiment, the loads were applied at frequencies of 400 to 2900 Hz in steps of 100 Hz.

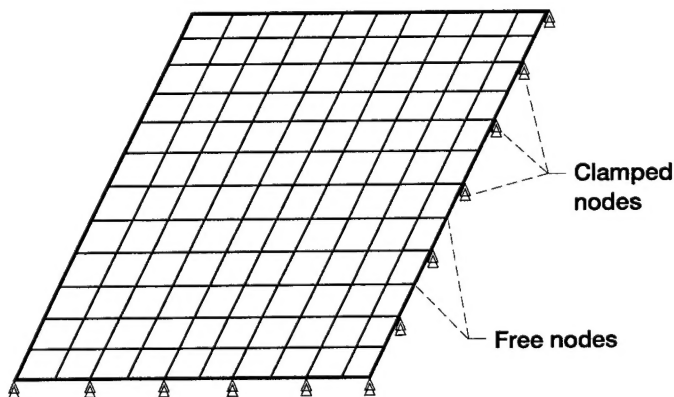


Figure 5.—Plate used to model housing. Corner nodes and every other edge node clamped; other edge nodes free.

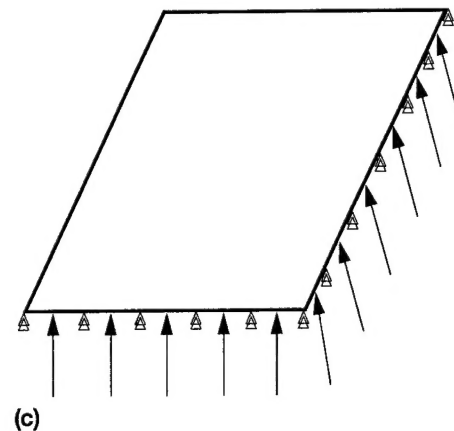
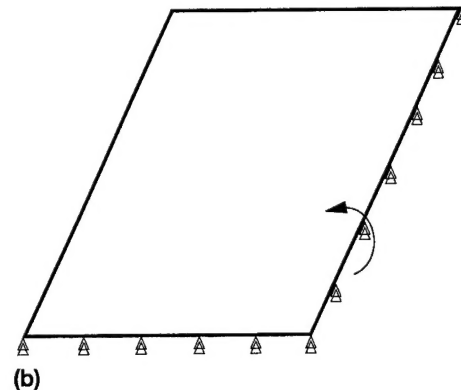
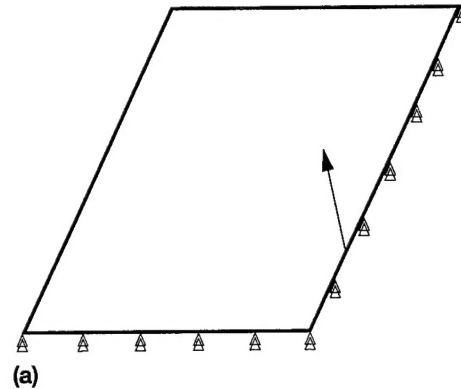


Figure 6.—Load cases. (a) Case (i), point load applied at free edge node. (b) Case (ii), point moment applied at free edge node. (c) Case (iii), point loads applied at each free edge node.

The forced vibration response predicted by the FEM model was used as the input to a boundary element method (BEM) model. The BEM model calculated the acoustic response of the plate, including the radiation efficiency. Figure 7 shows the radiation efficiencies predicted for the three loading cases by the combined BEM/FEM model. An

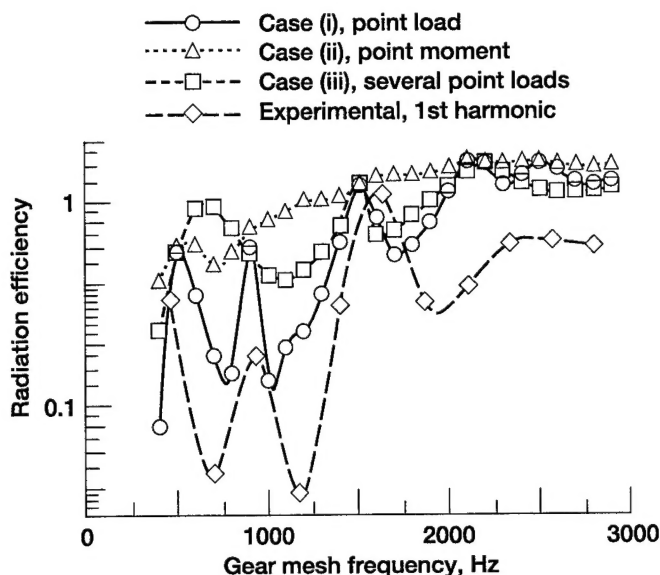


Figure 7.—Effect of different loadings of Fig. 6 on predicted radiation efficiency of a baffled plate.

experimental value (based on the 1st harmonic) is also shown for comparison. The results in Fig. 7 indicate that the loading condition strongly influences the predicted acoustic response, especially at lower frequencies. The single normal force (case (i)) seems to best reproduce the variation in radiation efficiency displayed in the experimental results. The peaks seen in case (i) at 500, 900, and 1500 Hz correspond to the (1,1), (1,2), and (2,2) modes of Table I, which indicates that these modes are fairly efficient radiators. These peaks are also seen in the predicted radiation efficiency, although at generally lower values.

SUMMARY AND CONCLUSIONS

Acoustic intensity and vibration measurements were performed on a simple gearbox made from welded steel plates. The radiation efficiency for the housing was computed from the intensity and vibration data. This was compared with the intensity predicted by ideal acoustic models. Finally, a combined finite element/boundary element model was used to predict the radiation efficiency of the top plate of the housing. The following conclusions were drawn:

1. A finite element model can simulate the vibration modes of a structure such as a gearbox top. If the gear dynamic excitation is adequately simulated, the model can predict the structural response of the actual gearbox.

2. A boundary element model can predict the acoustic response of a vibrating structure if the vibration characteristics are known. A combined finite element/boundary element model may be used to predict the operating noise characteristics.

3. Ideal acoustical models (such as a monopole, dipole, flat plate, or cylinder) do not adequately simulate the modal vibration behavior of a gearbox. These ideal models cannot predict the variation in acoustic response due to vibration modes. Therefore, ideal models predict only general trends.

REFERENCES

- Beranek, L.L., 1971, *Noise and Vibration Control*, McGraw-Hill, Inc., New York.
- Cremer, L., Heckl, M., and Ungar, E.E., 1973, *Structure-Borne Sound*, Berlin: Springer-Verlag.
- Fahy, F., 1985, "Sound and Structural Vibration-Radiation, Transmission and Response," Academic Press Limited, San Diego.
- Guyader, J.-L., 1994, "Methods to Reduce Computing Time in Structural Acoustics Predictions," *Third International Congress on Air- and Structure-borne Sound and Vibration*, Montreal, pp. 5-20.
- Heath, G.F., and Bossler, R.B., Jr., 1993, "Advanced Rotorcraft Transmission (ART) Program—Final Report," NASA CR-191057.
- Kato, M., Inoue, K., and Shibata, K., 1994, "Evaluation of Sound Power Radiated by a Gearbox," *International Gearing Conference*, Newcastle Upon Tyne.
- Lim, T. C., 1989, "Vibration Transmission Through Rolling Element Bearings in Gearing Systems," Ph.D. Dissertation, The Ohio State University, Columbus, OH.
- Lim, T.C., and Singh, R., 1989, "A Review of Gear Housing Dynamics and Acoustics Literature," NASA CR-185148 or AVSCOM Technical Memorandum 89-C-009.
- Oswald, F.B., Seybert, A.F., Wu, T.W., and Atherton, W., 1992, "Comparison of Analysis and Experiment for Gearbox Noise," *Proceedings of the International Power Transmission and Gearing Conference*, Phoenix, pp. 675-679.
- Sabot, J., and Perret-Liaudet, J., 1994, "Computation of the Noise Radiated by a Simplified Gearbox," *International Gearing Conference*, Newcastle upon Tyne.
- Seybert, A.F., Wu, T.W., Wu, X.F., and Oswald, F.B., 1991, "Acoustical Analysis of Gear Housing Vibration," NASA TM-103691.
- Seybert, A.F., Wu, T.W., and Wu, X.F., 1994, "Experimental Validation of Finite Element and Boundary Element Methods for Prediction of Structural Vibration and Radiated Noise," NASA CR-4561.
- Van Roosmalen, A.N.J., 1994, "Design Tools for Low Noise Gear Transmissions," Ph.D. Dissertation, Eindhoven University of Technology.
- Wallace, C.E., 1972, "Radiation Resistance of a Rectangular Panel," *Journal of the Acoustical Society of America*, vol. 51, no. 3, pp. 946-952.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 1996		3. REPORT TYPE AND DATES COVERED Technical Memorandum
4. TITLE AND SUBTITLE Acoustic Radiation Efficiency Models of a Simple Gearbox			5. FUNDING NUMBERS WU-505-62-36 1L162211A47A	
6. AUTHOR(S) Mark F. Jacobson, Rajendra Singh, and Fred B. Oswald				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Lewis Research Center Cleveland, Ohio 44135-3191 and Vehicle Propulsion Directorate U.S. Army Research Laboratory Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-10264	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, D.C. 20546-0001 and U.S. Army Research Laboratory Adelphi, Maryland 20783-1145			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-107226 ARL-TR-1111	
11. SUPPLEMENTARY NOTES Prepared for the Seventh International Power Transmission and Gearing Conference sponsored by the American Society of Mechanical Engineers, San Diego, California, October 6-9, 1996. Mark F. Jacobson, Ohio State University, Columbus, Ohio 43210, presently at Ford Motor Company, Dearborn, Michigan; Rajendra Singh, Ohio State University, Columbus, Ohio 43210; Fred B. Oswald, NASA Lewis Research Center. Responsible person, Fred B. Oswald, organization code 2730, (216) 433-3957.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category 37 This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Acoustic intensity measurements were conducted on a simple spur gear transmission in a welded steel housing. The radiation efficiency of the housing was computed from the intensity data for the first three harmonics of mesh frequency. Finite element and boundary element methods (FEM/BEM) were used jointly to model acoustics and dynamics of the top plate of the housing. For a simply supported elastic plate, reasonable agreement was achieved between experimental radiation efficiencies and those predicted with FEM/BEM. However, predictions of the housing characteristics were only partially successful. Four simple analytical models were examined to judge their ability to predict the radiation efficiency. These models do not simulate the modal characteristics of a gearbox; therefore their predictions yield only general trends. Discrepancies are believed to be related to inaccurate modeling of the excitation of the structure as well as to interactions between modes of vibration.				
14. SUBJECT TERMS Acoustic intensity; Gears; Gearbox; Radiation efficiency			15. NUMBER OF PAGES 07	
			16. PRICE CODE A02	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	